



Nominal Capacity			5000mAh				
Nominal Voltage			1.2V				
Charging Current		Standard	500mA				
		Fast	7500mA				
Charging Time		Standard	14 to 16Hrs.				
		Fast	about 1Hr.				
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]				
		Fast	0°C to +45°C [+32°F to 113°F]				
	Discharge		-20°C to +60°C [-4°F to 140°F]				
	Storage		-30°C to +50°C [-22°F to 122°F]				
Internal Impedance (Av.) (at 50% discharge)			3.5mΩ (at 1000Hz)				
Weight			152g/5.36oz				
Dimensions(D)×(H) (with tube)			33.2	⁰ _{-0.9}	× 59.5	⁰ _{-1.5}	mm
			1.31	⁰ _{-0.04}	× 2.34	⁰ _{-0.06}	inch

Typical Characteristics


Charge

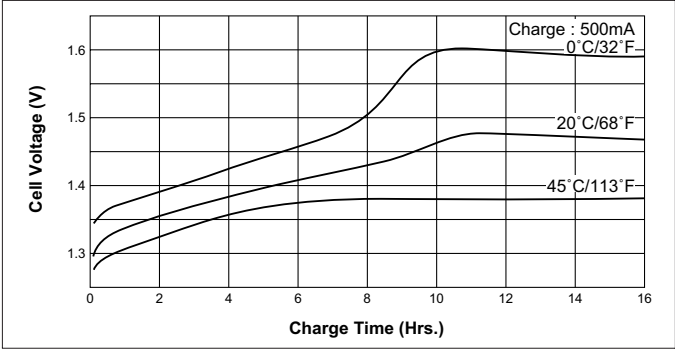


Discharge (at high rate)

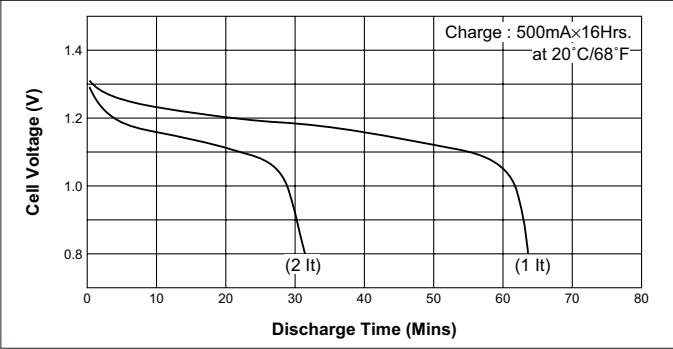


Charge

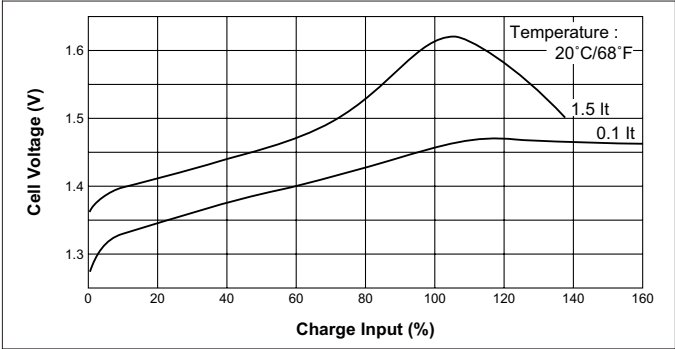

Discharge (at high rate)

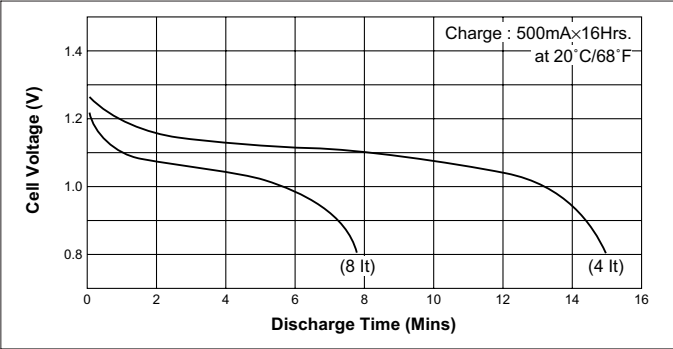

Discharge (at low rate)

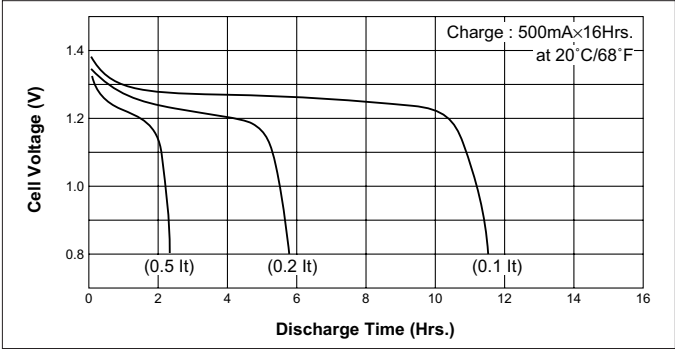

Temperature (Charge & Discharge)

