


Product Datasheet

Alkaline

LR6 Powerline



LR6AD

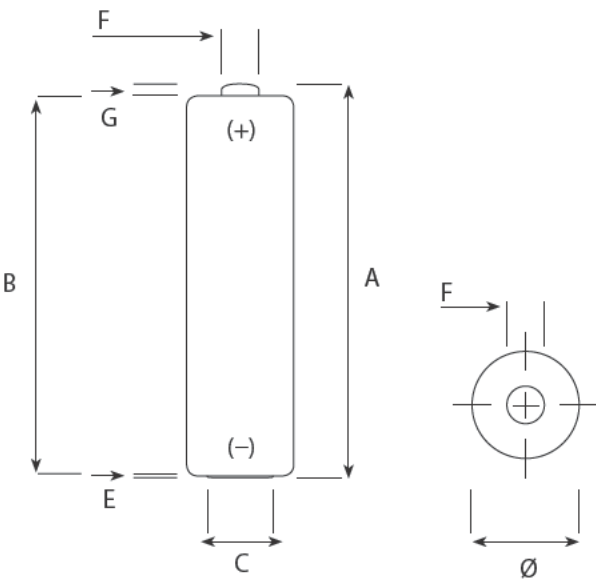

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	50,5	—
B	—	49,5
C	—	7,0
E	0,5	—
F	5,5	—
G	—	1,0
Ø	14,5	13,7

Specifications

Name	LR6 / M / AA / AM3 / MIGNON / MN1500 / 15A / 15AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	23 g
Storage temperature range	+10°C (50°F) ~ +25°C (77°F)
Operating temperature range	-20°C (-4°F) ~ +55°C (131°F)
Average Impedance	+/- 105 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC Nordic Ecolabel
Recommended cut off voltage	0,8V per cell (0,9V per cell for multi series usage)

For more information:


www.panasonic-batteries.com

Panasonic


Typical discharge values

LR6AD


Radio/Clock
4h/d 43 ohm end 0,9V

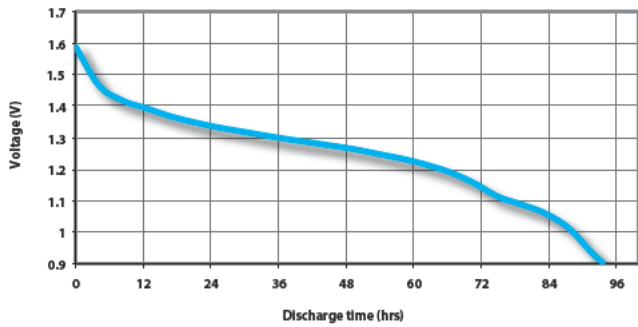

Digital audio
1h/d 100 mA end 0,9V

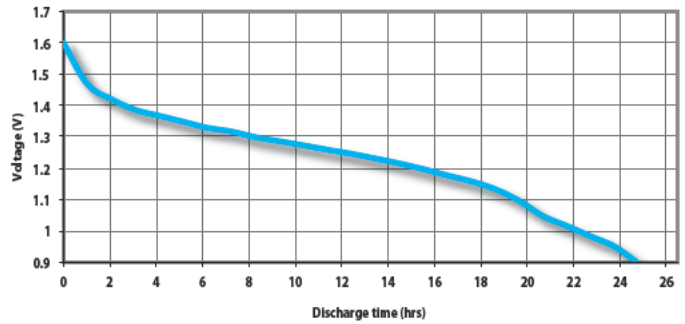

Motor/toy
1h/d 3,9 ohm end 0,8V

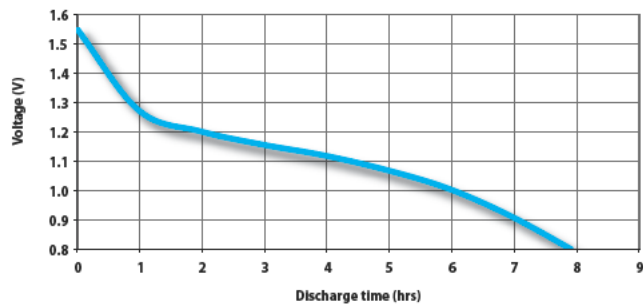

Remote control
15s/m 8h/d 24 ohm end 1,0V



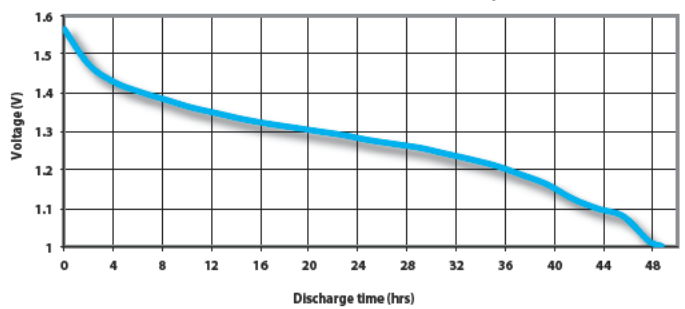



Photo flash
10s/m 1h/d 1000 mA end 0,9V

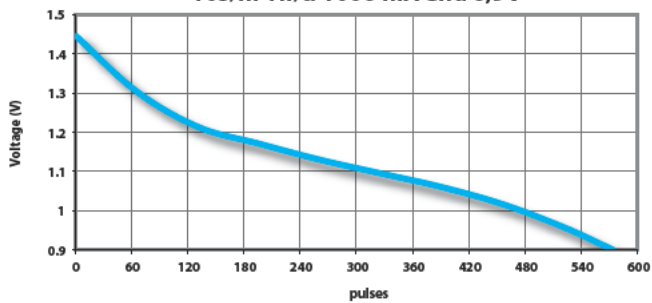

CD/Electronic games
1h/d 250 mA end 0,9V

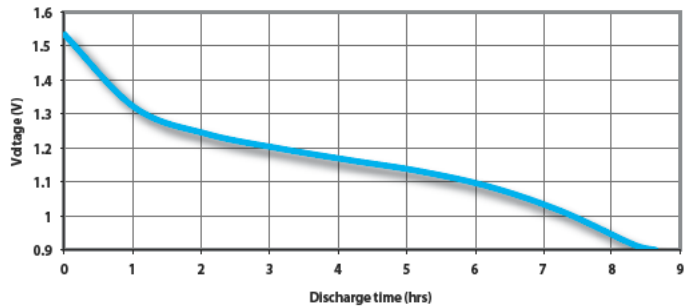

DSC
10x(2s 1,5W/28s 0,65W) 5m,55m off,
24h/d end 1,05V

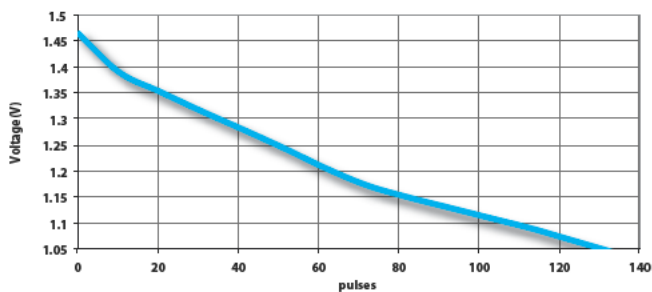

Portable lighting
4m/h 8h/d 3,3 ohm end 0,9V

