


- Plug-in unit
- Fixed output voltages
- Thermal fuse in transformer
- Available as standard version with bridge rectifier and capacitor
- Exchangeable output plugs
- Plugg-inn enhet
- Faste utgangsspenninger
- Termosikring i transformator
- Standardversjonen leveres med brolikere og kondensator
- Utskiftbare plugger


**Technical specifications**

Input voltage:  
 Output voltage:  
 Max. output power:  
 Insulation class:  
 Electrical safety standard:  
 EMC standards  
 • Emission:  
 • Immunity:  
 Output terminals  
 Cord with/without plug:  
 Dimensions excl. plug (LxWxH):  
 Weight:

**Tekniske data**

Inngangsspenning: 230 VAC +6/-10%, 50/60Hz  
 Utgangsspenning: 3-42 VDC  
 Maks. utgangseffekt: 8 W  
 Isolasjonsklasse: II  
 Elektrisk sikkerhetsstandard: EN 60065, EN 60950  
 EMC standarder  
 • Emisjon: EN 61000-6-3  
 • Immunitet: EN 61000-6-1  
 Utgangsterminaler  
 Sek. ledning med/uten plugg: Accessories /Tilbehør  
 Mål uten plugg (LxBxH): 95 x 51 x 57 mm  
 Vekt: 390 g

VDC

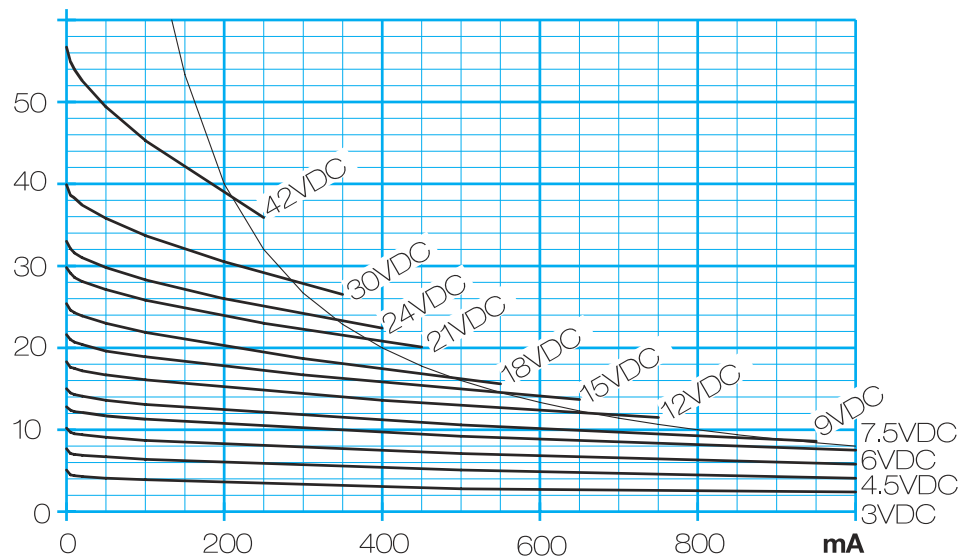

Voltage version (VDC) Spenningsversjoner (VDC)	Max. power (W) Maks. effekt (W)
3	2,0
4,5	4,0
6	6,0
7,5	6,5
9	7,0
12	7,5
15	8,0
18	7,5
21	8,0
24	8,0
30	8,0
42	8,0