



Nominal Capacity			1700mAh		
Nominal Voltage			1.2V		
Charging Current		Standard	170mA		
		Fast	2550mA		
Charging Time		Standard	14 to 16Hrs.		
		Fast	about 1Hr		
Ambient Temperature	Charge	Standard	0 °C to +45 °C [ +32 °F to 113 °F]		
		Fast	5 °C to +40 °C [ +41 °F to 104 °F]		
	Discharge		-20 °C to +60 °C [ -4 °F to 140 °F]		
	Storage		-30 °C to +50 °C [ -22 °F to 122 °F]		
Internal Impedance (Av.) (at 50% discharge)			4.0mΩ (at 1000Hz)		
Weight (with tube)			Approx. 42g / 1.48oz		
Dimensions(D)×(H) (with tube)			22.9 <sup>0</sup> <sub>-1.0</sub>	×	34.0 <sup>0</sup> <sub>-1.2</sub> mm
			0.90 <sup>0</sup> <sub>-0.04</sub>	×	1.34 <sup>0</sup> <sub>-0.05</sub> inch

Typical Characteristics


Charge

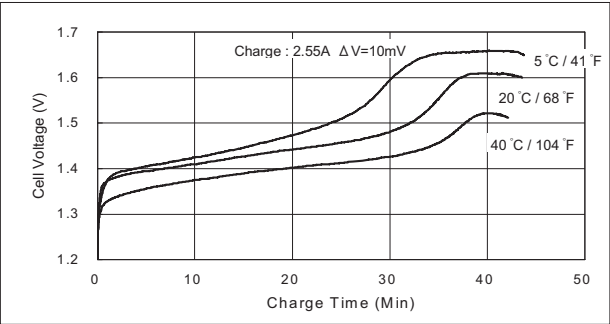


Discharge (at high rate)

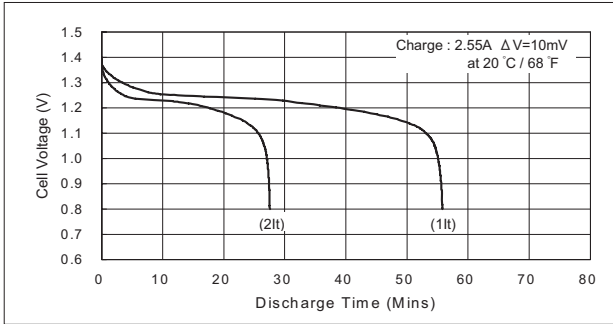


Cell Capacity (at various discharge rate)

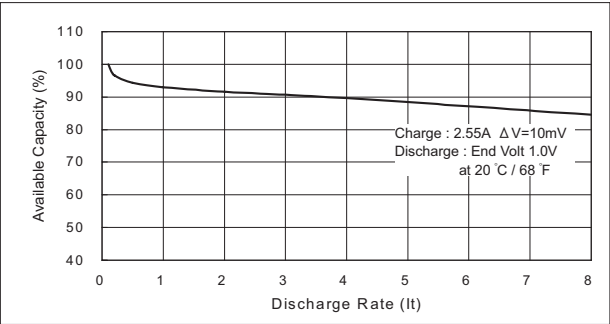

Discharge (at high rate)

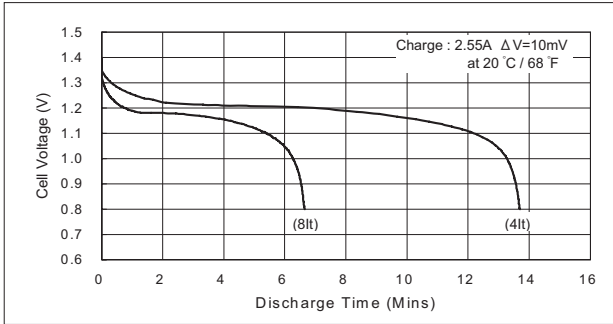

Discharge (at low rate)

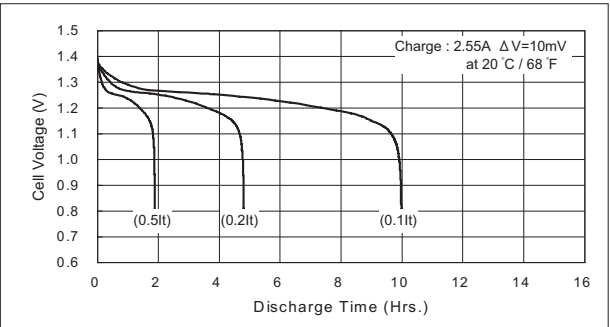

Temperature (Charge & Discharge)

