



FT12-105 (12V105Ah)

FT (Front Terminal) Series is specially designed for telecom use with 10+ years design life in float service. By adopting a new AGM separator and centralised venting system, the battery can be installed in any position while maintaining high reliability. The dimensions of the FT series is designed for 19" and 23" cabinet installation. It is suitable for UPS/EPS applications.



Specification

| | |
|--|---|
| Cells Per Unit | 6 |
| Voltage Per Unit | 12 |
| Capacity | 105Ah@10hr-rate to 1.80V per cell @25°C |
| Weight | Approx.32.5Kg (Tolerance $\pm 2\%$) |
| Max. Discharge Current | 1050 A (5 sec) |
| Internal Resistance | Approx. 6.5 m Ω |
| Operating Temperature Range | Discharge: -20°C~60°C Charge: 0 °C~50°C Storage: -20°C~60°C |
| Normal Operating Temperature Range | 25°C \pm 5°C |
| Float charging Voltage | 13.6 to 13.8 VDC/unit Average at 25°C |
| Recommended Maximum Charging Current Limit | 31.5 A |
| Equalization and Cycle Service | 14.6 to 14.8 VDC/unit Average at 25°C |
| Self Discharge | RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using. |
| Terminal | Terminal F8 |
| Container Material | A.B.S. UL94-HB, UL94-V0 Optional. |



MH28539



G4M20206-0910-E-16



CERTIFICATE

Postcode: 421001

is in conformity with

ISO 14001:2004 Standard



CERTIFICATE

Postcode: 421001




is in conformity with

OHSAS 18001:1999 Standard

Dimensions

Unit: mm Dimension: 508(L)×111(W)×236(H)

Terminal F8

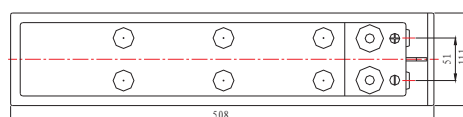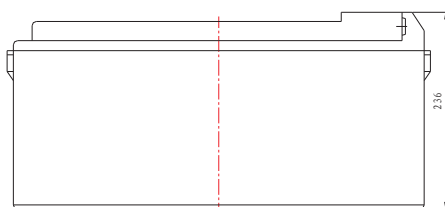

Constant Current Discharge Characteristics: A (25°C)


| F.V/Time | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| 9.60V | 181.1 | 105.5 | 65.54 | 40.46 | 27.50 | 22.17 | 18.41 | 12.12 | 10.93 | 5.78 |
| 10.0V | 177.4 | 104.1 | 64.67 | 39.65 | 26.99 | 21.86 | 18.24 | 12.08 | 10.82 | 5.68 |
| 10.2V | 173.6 | 102.6 | 64.05 | 39.23 | 26.75 | 21.64 | 18.12 | 11.97 | 10.71 | 5.57 |
| 10.5V | 165.3 | 99.7 | 63.27 | 38.72 | 26.51 | 21.32 | 17.97 | 11.86 | 10.61 | 5.46 |
| 10.8V | 152.4 | 96.4 | 62.39 | 38.40 | 26.20 | 20.59 | 17.88 | 11.81 | 10.51 | 5.40 |
| 11.1V | 136.7 | 92.8 | 60.91 | 36.85 | 25.69 | 20.29 | 17.75 | 11.72 | 10.39 | 5.19 |

Constant Power Discharge Characteristics: W (25°C)


| F.V/Time | 15MIN | 30MIN | 1HR | 2HR | 3HR | 4HR | 5HR | 8HR | 10HR | 20HR |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 9.60V | 1967 | 1208 | 759.5 | 474.2 | 323.7 | 265.4 | 220.5 | 145.2 | 131.0 | 69.68 |
| 10.0V | 1939 | 1195 | 752.6 | 468.4 | 318.9 | 261.7 | 218.5 | 144.6 | 130.0 | 68.47 |
| 10.2V | 1917 | 1185 | 748.1 | 465.0 | 317.5 | 259.2 | 217.2 | 143.5 | 128.8 | 67.20 |
| 10.5V | 1831 | 1161 | 743.3 | 459.2 | 314.9 | 255.7 | 215.5 | 142.3 | 127.6 | 65.93 |
| 10.8V | 1709 | 1133 | 733.8 | 455.8 | 311.4 | 247.1 | 214.5 | 141.7 | 126.3 | 65.29 |
| 11.1V | 1556 | 1102 | 722.8 | 438.7 | 306.2 | 243.5 | 213.7 | 140.7 | 124.9 | 62.96 |

All mentioned values are average values (Tolerance $\pm 2\%$).


Effect of temperature on long term float life

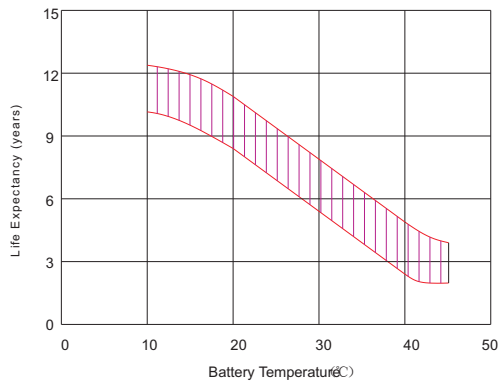


Storage characteristic

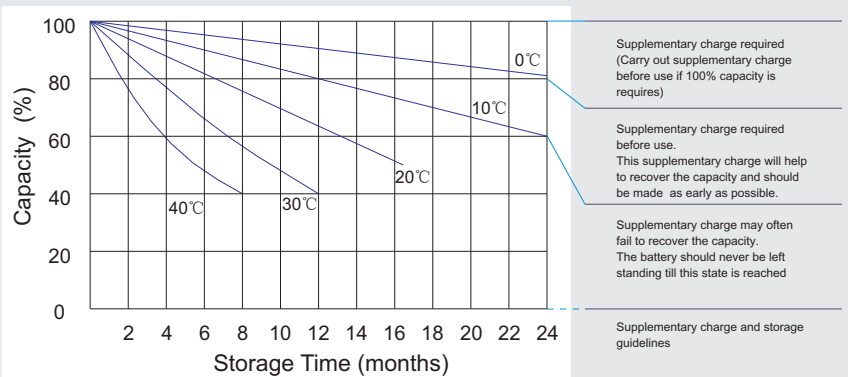

Charge characteristic Curve for standby use

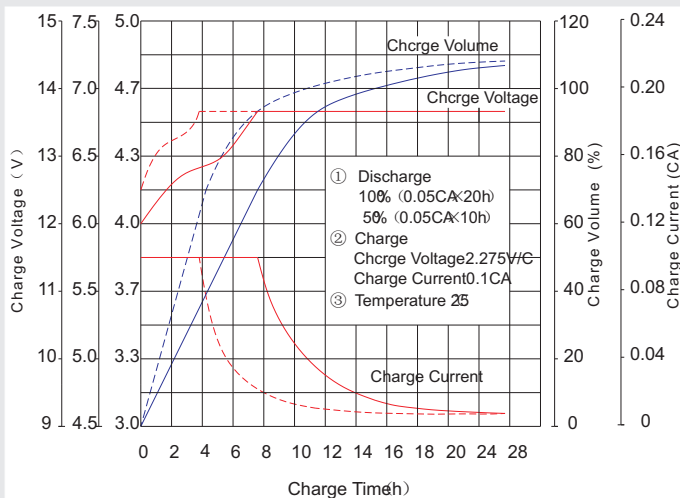

Discharge characteristic Curve

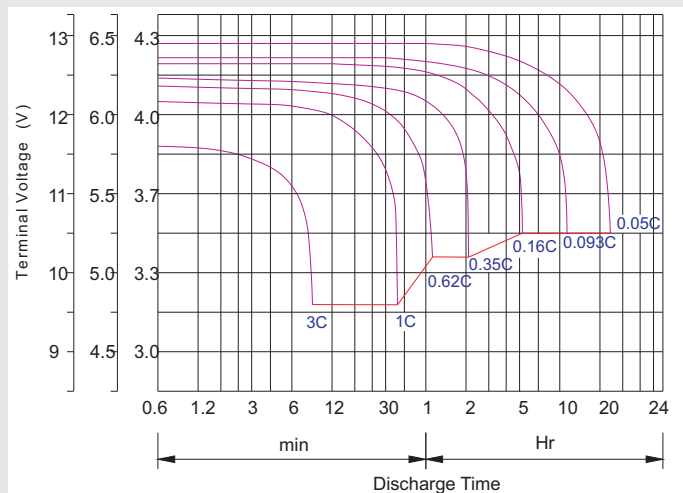

Capacity Factors With Different Temperature

| Battery Type | | -20°C | -10°C | 0°C | 5°C | 10°C | 20°C | 25°C | 30°C | 40°C | 45°C |
|--------------|--------|-------|-------|-----|-----|------|------|------|------|------|------|
| GEL Battery | 6V&12V | 50% | 70% | 83% | 85% | 90% | 98% | 100% | 102% | 104% | 105% |
| | 2V | 60% | 75% | 85% | 88% | 92% | 99% | 100% | 103% | 105% | 106% |
| AGM Battery | 6V&12V | 46% | 66% | 76% | 83% | 90% | 98% | 100% | 103% | 107% | 109% |
| | 2V | 55% | 70% | 80% | 85% | 92% | 99% | 100% | 104% | 108% | 110% |

Discharge C current V S. Discharge Voltage

| Final Discharge Voltage V /cell | 1.75V | 1.70V | 1.60V |
|---------------------------------|------------|-------------------|------------|
| Discharge Current (A) | (A) ≤ 0.2C | 0.2C < (A) < 1.0C | (A) ≥ 1.0C |

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

| | |
|------------------|--|
| Constant Voltage | -0.2Cx2h+2.4-2.45V/cellx24h, Max. C current 0.3C |
| Constant Current | -0.2Cx2h+0.1Cx12h |
| Fast | -0.2Cx2h+0.3Cx4h |

| Bolt | M5 | M6 | M8 |
|----------|-----------------------|------------------|-----------------------|
| Terminal | F3 F4 F13 F18 T25 T26 | F8 F11 F12-1 F15 | F5 F9 F10 F12 F14 F16 |
| Torque | 6~7N·m | 8~10N·m | 10~12N·m |

Maintenance & Cautions

Float Service:

- ※ Every month, recommend inspection every battery voltage.
- ※ Every three months, recommend equalization charge for one time.

Equalization charge method:

Discharge: 100% rate capacity discharge.

Charge: Max. current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h.

※ Effect of temperature on float charge voltage: -3mV/ °C/Cell.

※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.