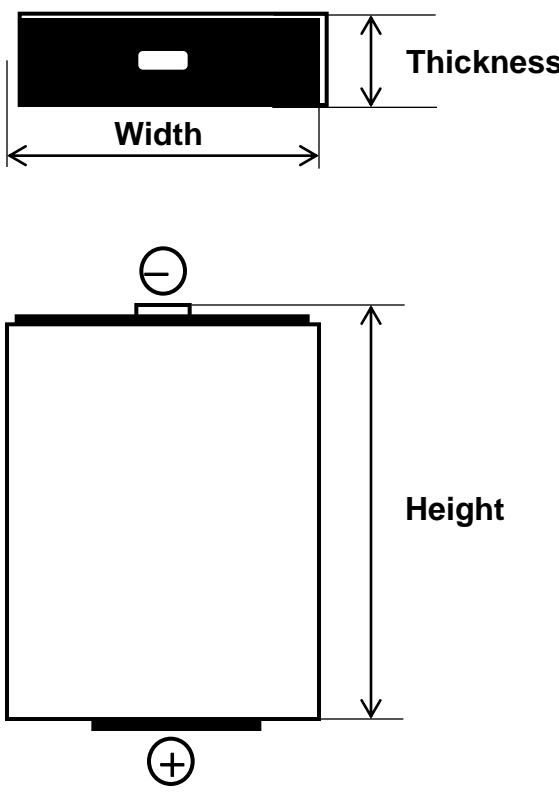


# Basic Specification

**maxell**

Type		ICP463048XS	
Dimension [mm]	Thickness (Shipment)	4.3 <sup>+0.20</sup> / <sub>-0.20</sub>	
	Thickness (Maximum)	4.60	
	Width	29.30 <sup>+0.20</sup> / <sub>-0.20</sub>	
	Height	47.50 <sup>+0.30</sup> / <sub>-0.30</sub>	
Max C Rate (C/D)		1/1.5	
Voltage Range [V]		2.75 to 4.25	
Operating Temperature Range (C/D) [deg.C]		C:0 to +45 D:-20 to +60	
Storage Temperature [deg.C]		-20 to +45 (within 90 days)	
Capacity(Ah) (Min./Typ.)		0.75/0.78	
Energy Density(Wh/l)		482	