
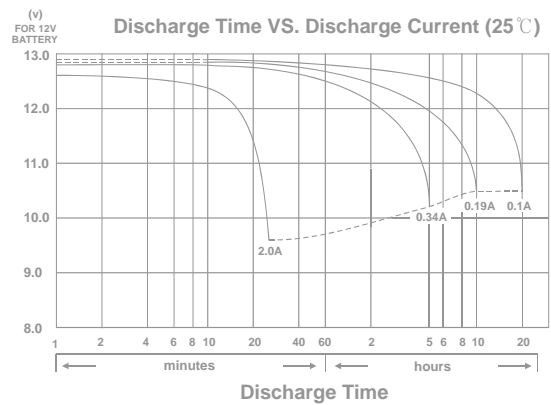


RECHARGEABLE SEALED LEAD ACID BATTERY

SPECIFICATION

(Thermal Protector)

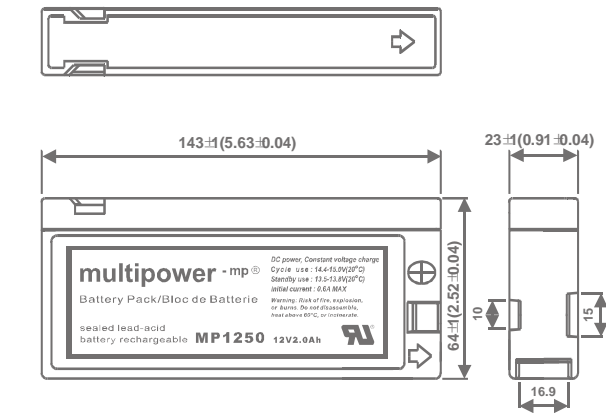

MP1250

Nominal Voltage(V) 12V

Nominal Capacity			
20 hour rate	(0.10A to 10.50V)	2.0Ah	
10 hour rate	(0.19A to 10.50V)	1.9Ah	
5 hour rate	(0.34A to 10.20V)	1.7Ah	
1 C	(2.0A to 9.60V)	0.9Ah	

Weight Approx. 650g(1.43Lbs.)

Internal Resistance (at 1KHz) Approx. 105 mΩ

Maximum Temperature Resistance 70°C

Maximum Current Resistance 10A

Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	14.4 to 15.0V
Coefficient	-5.0mv/°C/cell
Maximum Charging Current:	0.6A
Standby use:	
Float Charging Voltage	13.50 to 13.80V
Coefficient	-3.0mv/°C/cell

Operating Temperature Range

Charge	-15°C(5°F) to 40°C(104°F)
Discharge	-15°C(5°F) to 50°C(122°F)
Storage	-15°C(5°F) to 40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)


1 month	92%
3 month	90%
6 month	80%

Case Material ABS  
(UL94 HB flame retardant case / cover)


Terminal F13

## CHARACTERISTIC


Effect of Temperature on Capacity 25°C(77°F)

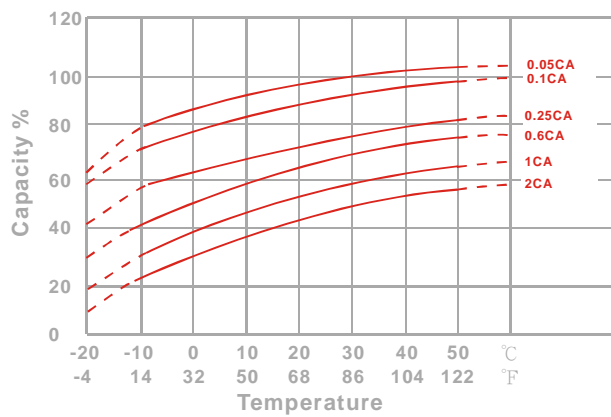

Capacity Retention Characteristic

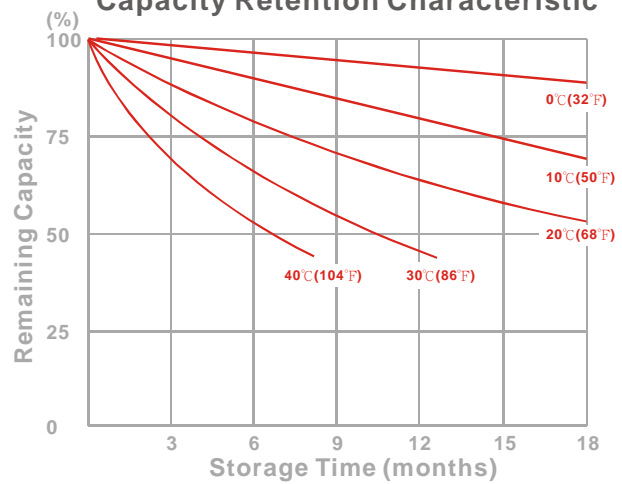

Trickle (or float) Service Life

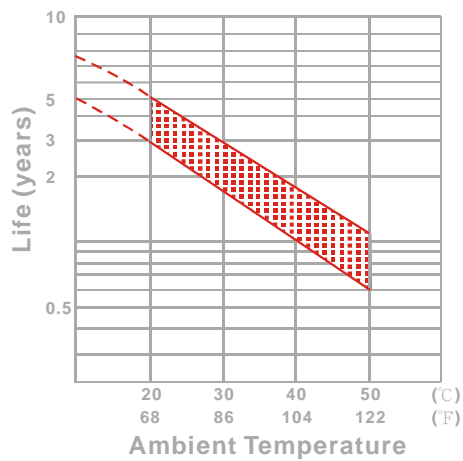

Cycle Service Life

