

STANDARD SERIES

Nickel-Cadmium

VR 2/3 D

Engineered for cycling applications
Saft's VR 2/3 D cell ideally suits for a wide range of applications.

In addition, the VR 2/3 D is well-adapted for applications requiring a permanent charge (C/20) at temperatures of up to +35°C.

Moreover, it offers a high level of reliability and an excellent cost/performance ratio.

To meet customers requirements, Saft provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.

Applications

- Professional electronics
- Gardening and tooling
- Home appliances
- Memory back-up systems

Main advantages

- Cycling application
- Quick and fast charge

Technology

- Sintered positive electrode
- Sintered negative electrode

Temperature range in discharge

-40°C to +60°C

Storage

Recommended: +5°C to +25°C

Relative humidity: 65 ± 5%

Data are given for single cell.

Please consult Saft for utilization of cell outside this specification.



Electrical characteristics

Nominal voltage (V)	1.2
IEC typical capacity (mAh) at C/5	2850
IEC minimum capacity (mAh) at C/5	2500
IEC designation	35/44
Impedance at 1000 Hz (mΩ)	3.3

Dimensions

Diameter (mm)	32.4
Height (mm)	43.3
Top projection (mm)	1.5 +/- 0.3
Top flat area diameter (mm)	5.6
Weight (g)	103

Dimensions are given for bare cells

Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Fast	~1	+10 to +40	2500
Quick	3 to 4	+5 to +40	500
Standard	16	0 to +50	250
Trickle *		-20 to +50	70

End of charge cut-off is requested: -dV or dT°C/dt

* Trickle charge follows quick or fast charge

The maximum battery temperature recommended during charge is +45°C

Maximum discharge current

Continuous (A) at +20°C	17.5
Peak (A) at +20°C*	108

* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell




STANDARD SERIES


Nickel-Cadmium

VR 2/3 D

Voltage in normal charge (current 0.1 C)

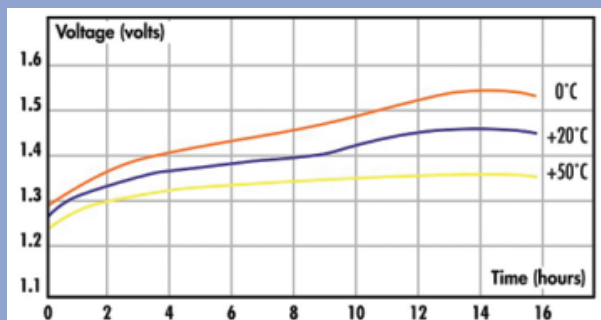


Voltage in fast charge (current 0.2 C)

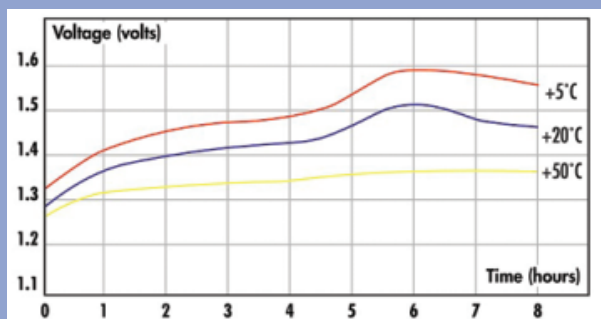


Voltage in discharge at +20°C

(after charge 0.1 C x 16 hours at +20°C)

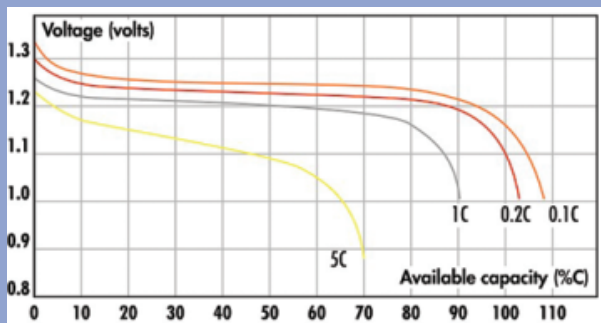


Available capacity (after charge 0.1 C x 16 hours at +20°C)

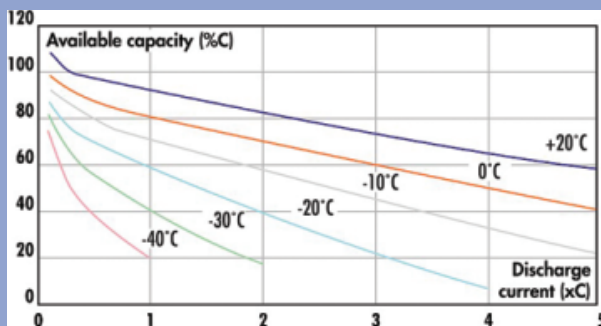

Typical performances

For graphs shown, C is the IEC₅ capacity.

Dimensions are in mm.

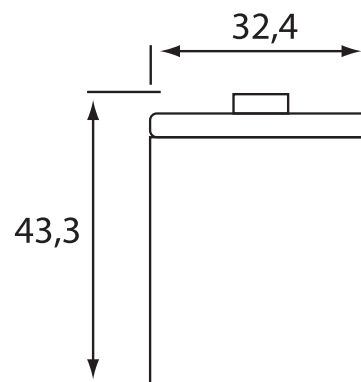

SAFT

Rechargeable Battery systems

12, rue Sadi Carnot

93170 Bagnolet - France

Phone: +33 (0)1 49 93 19 18

Fax: +33 (0)1 49 93 19 68

Email: rbs.info@saft.alcatel.fr

DOC. N° 11058-2-0402

Published by the Communication Department

www.saftbatteries.com

Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.

