

SL-840

Size: BEL

› XOL – extended operating life


Performance Data

(Typical values for batteries stored at +25 °C for one year)


System	Lithium Thionyl Chloride
Nominal voltage	3.6 V
Nominal capacity	0.42 Ah
Nominal current	0.5 mA
Max. continuous discharge current	5 mA
Pulse current capability	10 mA
Anode surface area	2.4 cm ²
Lithium content	0.13 g
Weight	6 g
Volume	2.1 cm ³
Temperature range	-55 °C ... +85 °C




SL-840

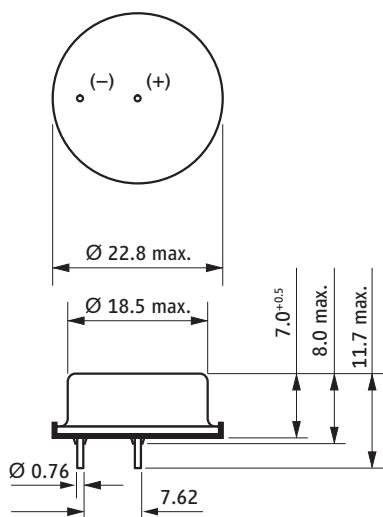


Typical Discharge Curves at +25 °C

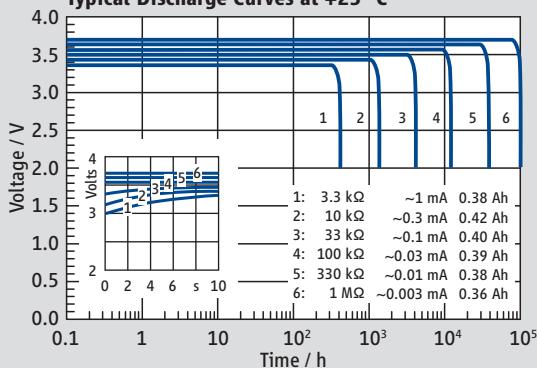

Available Capacity

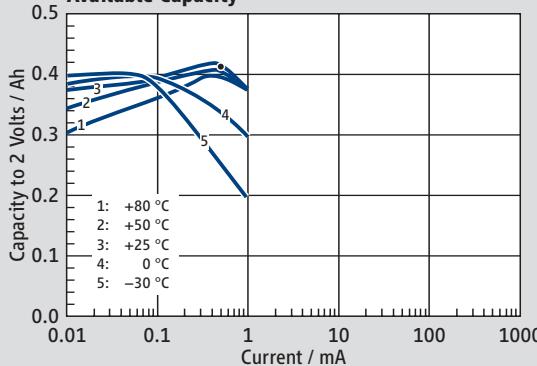

Operating Voltage

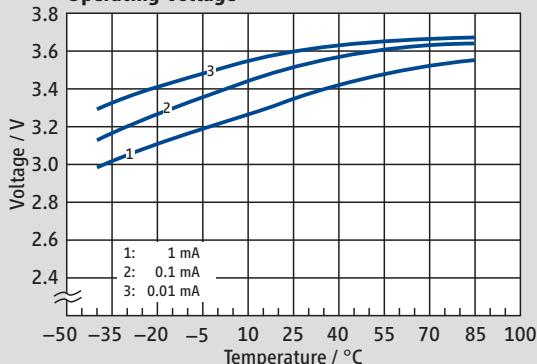

WARNING:

Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

Available Terminations

SL-840/P Pins

Catalogue No.

11 1 18404 00

Any values given here are for informational purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.

18

Tadiran Batteries GmbH • Industriestr. 22 • 63654 BÜDINGEN
GERMANY • Tel.: +49 (0)6042 954-0 • www.tadiranbatteries.de