

# HIGH TEMPERATURE SERIES

Nickel-Cadmium

## VT AA

The VT AA cell is designed to accept a permanent charge (C/20) for a minimum of 4 years in high temperature environments (up to +40°C) such as security lighting installations.

To meet customers requirements, Saft will provide custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.



### Applications

- Emergency lighting
- Professional lighting
- Memory back-up systems
- Security devices

### Main advantages

- Good charge efficiency at high temperatures
- Permanent charge
- Good storage retention

### Technology

- Sintered positive electrode
- Plastic bonded negative electrode

### Temperature range in discharge

-20°C to +60°C

### Storage

Recommended: +5°C to +25°C  
Relative humidity: 65 ± 5%

Data are given for single cell.

Please consult Saft for utilization of cell outside this specification.

### Electrical characteristics

Nominal voltage (V)	1.2
IEC typical capacity (mAh) at C/5	700
IEC minimum capacity (mAh) at C/5	600
IEC designation	KRMT 15/51
Impedance at 1000 Hz (mΩ)	16

### Dimensions

Diameter (mm)	14.0+/- 0.2
Height (mm)	50.2
Top projection (mm)	1.7 +/- 0.2
Top flat area diameter (mm)	4.0
Weight (g)	20

Dimensions are given for bare cells

### Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Standard	16	+10 to +65	60
Permanent		+15 to +45	30
Trickle *		+5 to +65	20

End of charge cut-off is requested: -dV or dT°C/dt

\* Trickle charge follows quick or fast charge

The maximum battery temperature recommended during charge is +45°C

### Maximum discharge current

Continuous (A) at +20°C	1.8
Peak (A) at +20°C*	18

\* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell




# HIGH TEMPERATURE SERIES

Nickel-Cadmium


VT AA

## Voltage in normal charge (current 0.1 C)

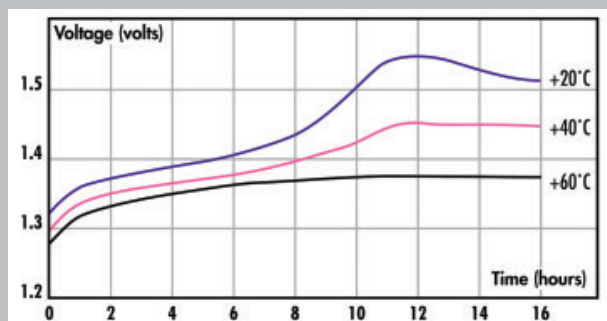


## Voltage in discharge at 0.5 C rate


(after charge 0.05 C x 48 hours)

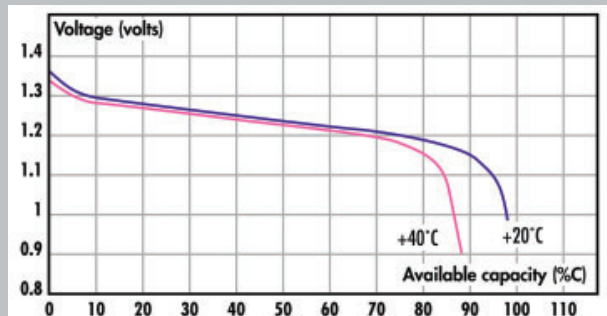

## Available capacity (discharge at 0.05 C x 48 hours)

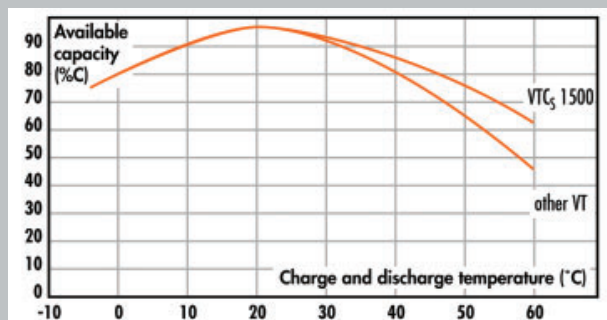


## Charge retention (between +20°C and +60°C)

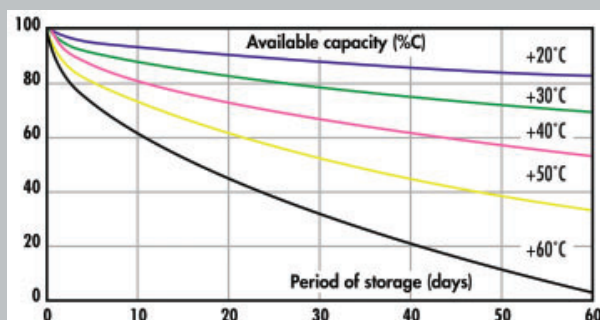

## Typical performances

For graphs shown, C is the IEC<sub>5</sub> capacity.

Dimensions are in mm.

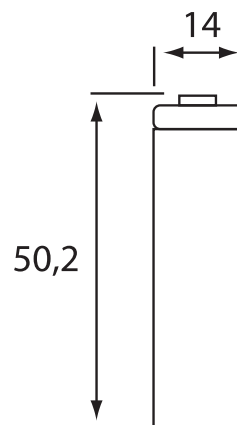

## SAFT

### Rechargeable Battery systems

12, rue Sadi Carnot

93170 Bagnolet - France

Phone: +33 (0)1 49 93 19 18

Fax: +33 (0)1 49 93 19 68

Email: rbs.info@saft.alcatel.fr

DOC. N° 11066-2-0602

Published by the Communication Department

[www.saftbatteries.com](http://www.saftbatteries.com)

Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.

