



Nominal Capacity		3000mAh
Nominal Voltage		1.2V
Charging Current	Standard	300mA
	Fast	4500mA
Charging Time	Standard	14 to 16Hrs.
	Fast	about 1Hr.
Ambient Temperature	Charge	Standard 0°C to +45°C [+32°F to 113°F] Fast 5°C to +40°C [+41°F to 104°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]
	Storage	-30°C to +50°C [-22°F to 122°F]
Internal Impedance (Av.) (at 50% discharge)		3.4mΩ (at 1000Hz)
Weight		86g/3.03oz
Dimensions(D)×(H) (with tube)		26.0 ⁰ _{-0.8} × 50.0 ⁰ _{-1.2} mm 1.02 ⁰ _{-0.03} × 1.97 ⁰ _{-0.05} inch

Typical Characteristics


Charge (5 cells pack)

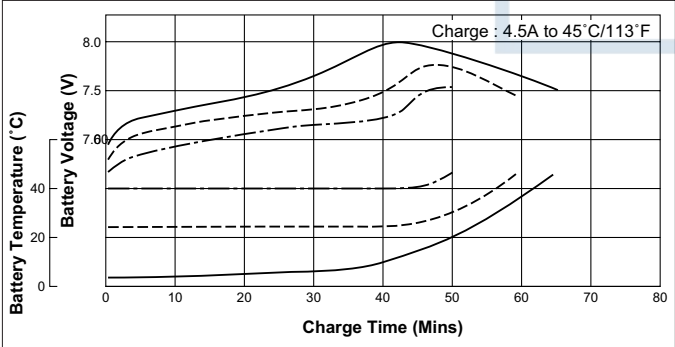


Discharge (at high rate)

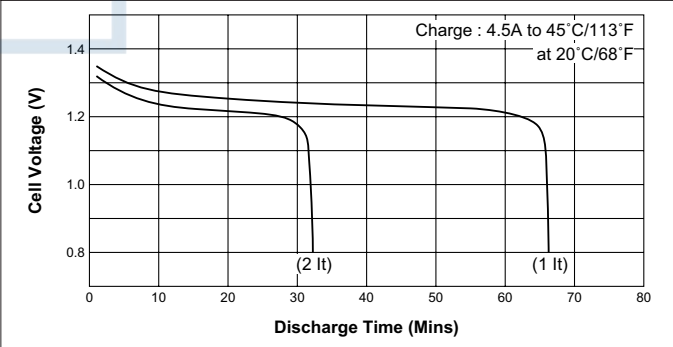


Cell Capacity (at various discharge rate)

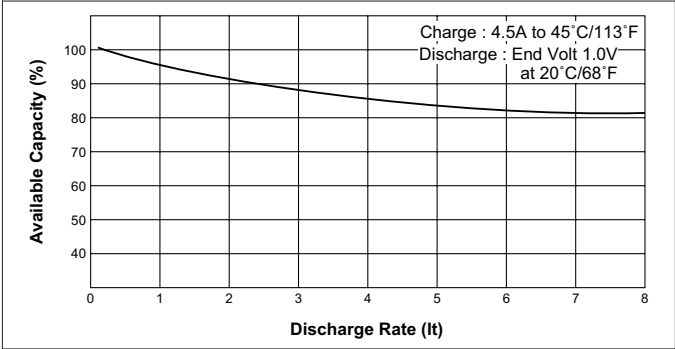

Discharge (at high rate)

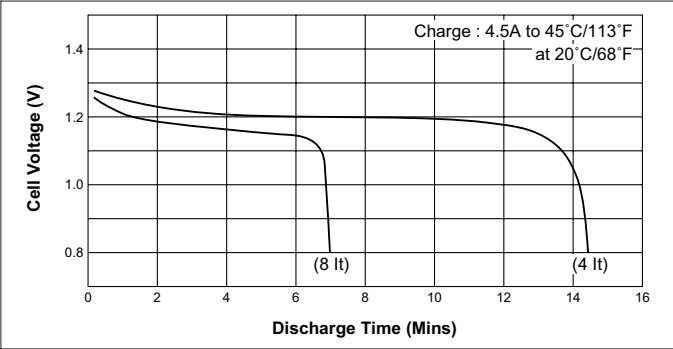

Discharge (at low rate)

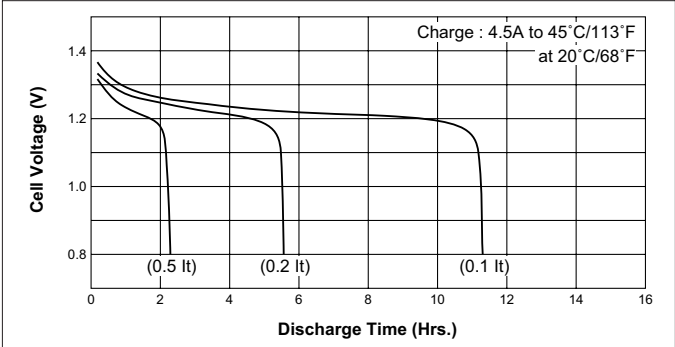

Temperature (Charge & Discharge)

